


LINE SIDE ENTRANCE
CONDUCTORS FURNISHED
AND INSTALLED BY CUSTOMER.

PLASTIC PROTECTIVE SHIELD
(NOT SHOWN)
MUST BE IN PLACE

COVER
NOT
SHOWN

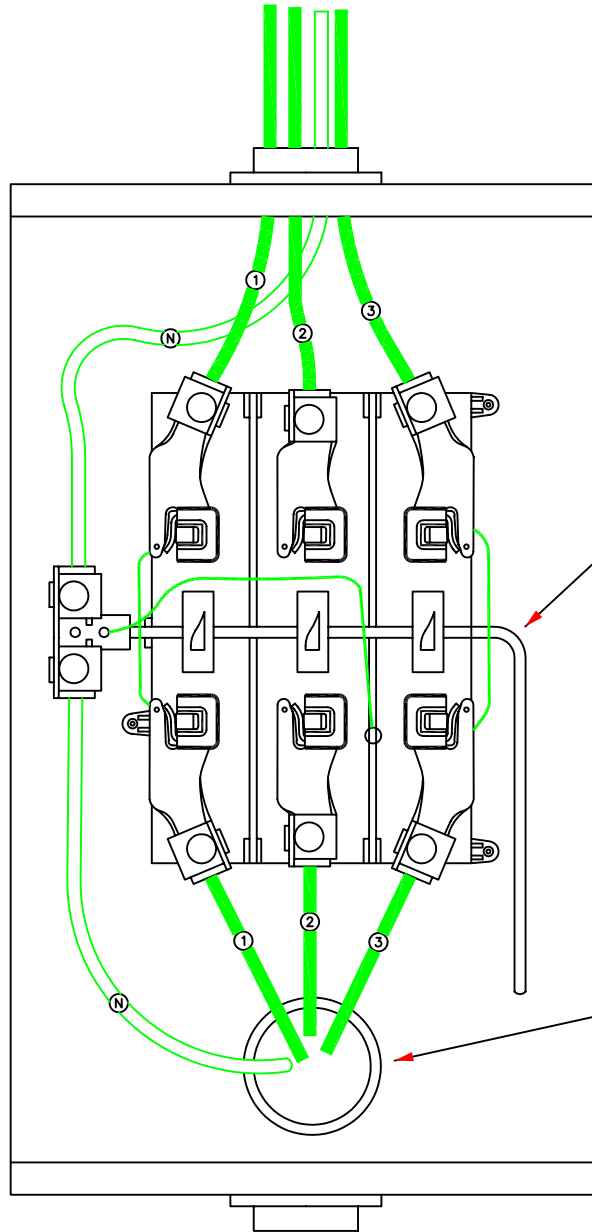

BY-PASS LEVER
DO NOT OPERATE UNLESS
METER IS IN PLACE.

BOX CONNECTOR
OR BUSHING

NOTE:
1. ON DELTA INSTALLATION No.3 POSITION IS POWER PHASE.

SELF-CONTAINED/OVERHEAD METER SOCKET
FOR USE ON 4 WIRE 3 PHASE SERVICES
ALL VOLTAGES UP TO 200 AMPS
NEWNAN UTILITIES-OWNED SOCKET